



## SERIE SP


## 150 GPM

## ACERO INOX

RANGO : 75 - 200 GPM

OUTLET: 3" NPT

NOMINAL DIA. 6"

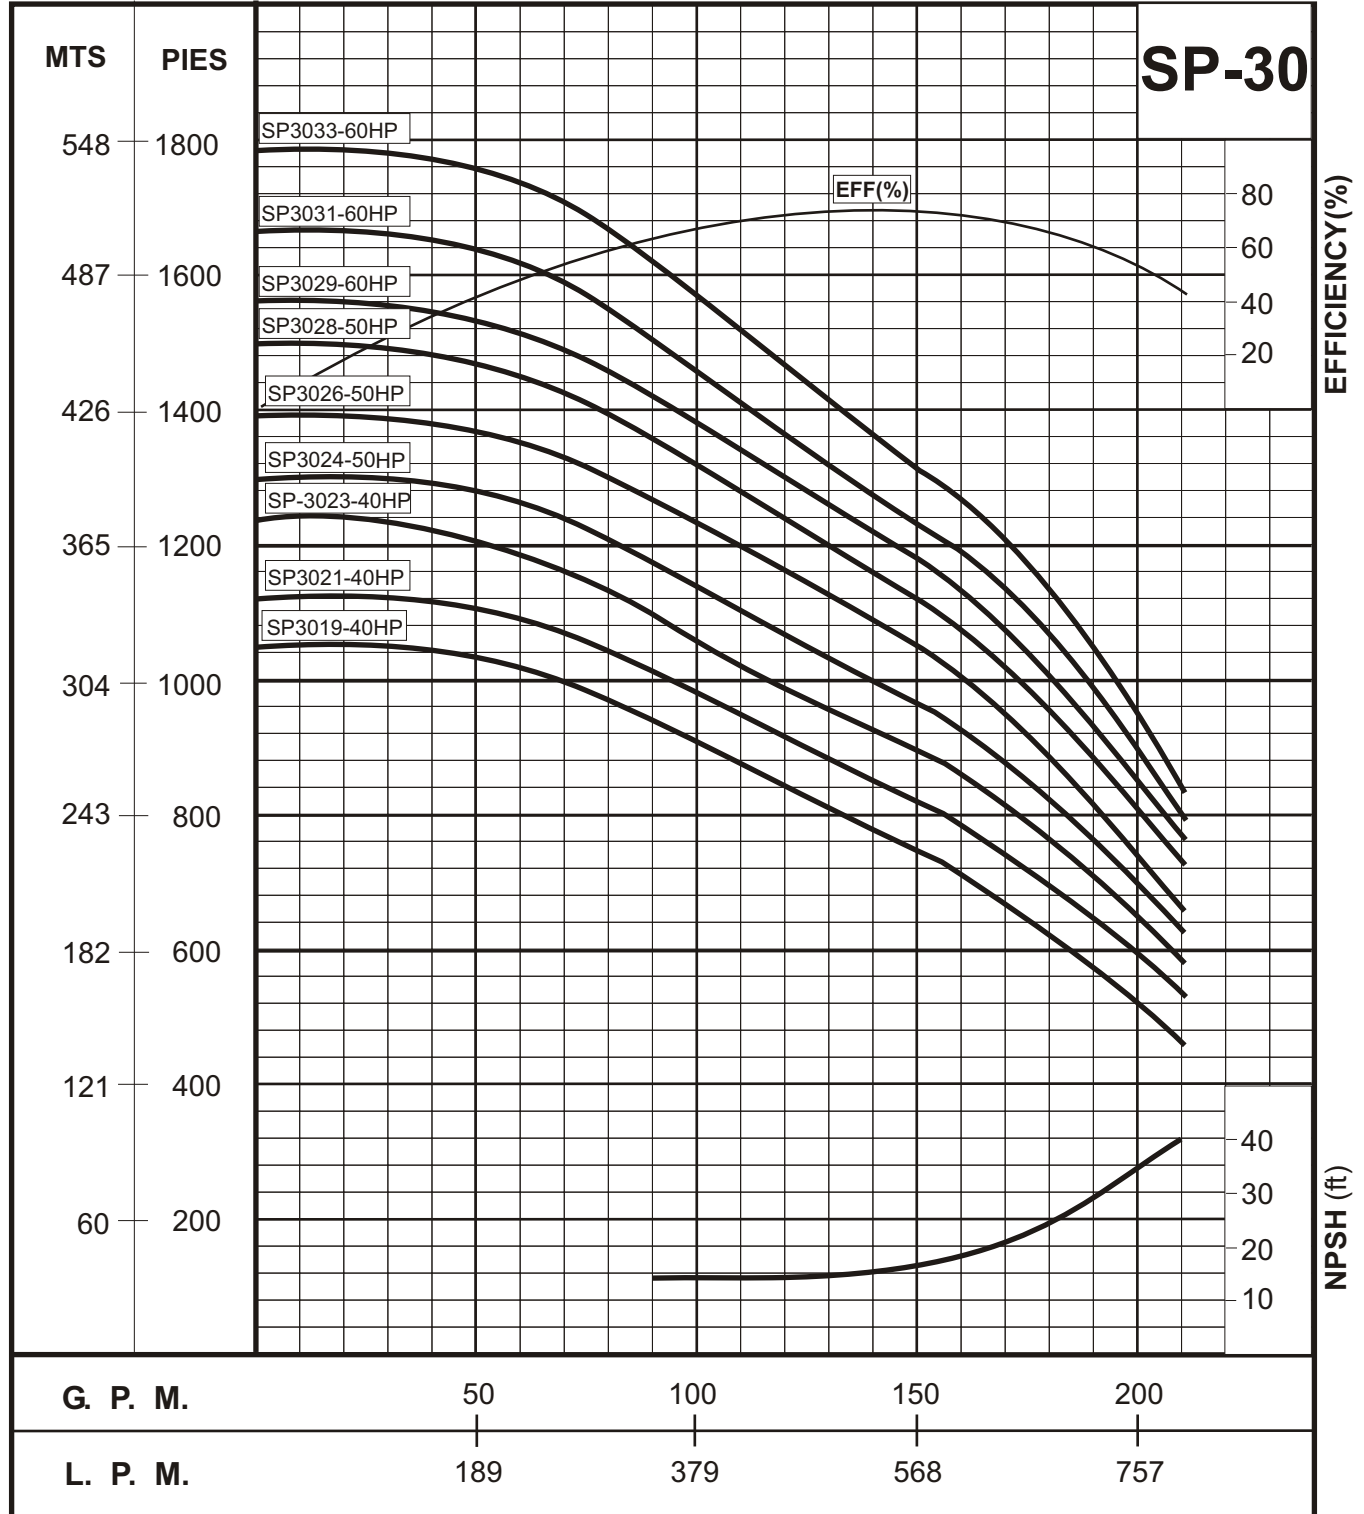

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B 6" MOTOR STANDARD, 10-60HP/3450 RPM. @ 5 ft. Min. Submergence.**




# Geobombas Ltda.



Franklin Electric

SERIE SP	150 GPM	ACERO INOX
----------	---------	------------

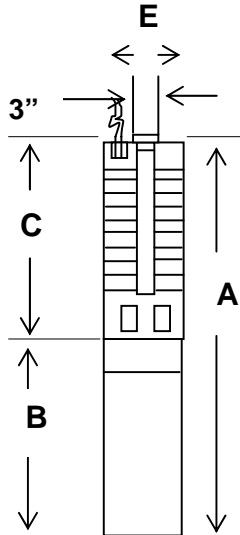

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP3018	40	119.4	40.8	5.6	306
SP3019	40	123.2	40.8	5.6	308
SP3020	40	127.0	40.8	5.6	323
SP3021	40	130.8	40.8	5.6	334
SP3022	40	134.5	40.8	5.6	338
SP3023	40	138.5	40.8	5.6	340
SP3024	50	162.2	57.8	5.6	442
SP3025	50	166.0	57.8	5.6	444
SP3026	50	169.8	57.8	5.6	446
SP3027	50	173.6	57.8	5.6	448
SP3028	50	177.4	57.8	5.6	450
SP3029	60	193.7	63.8	5.6	482
SP3030	60	197.5	63.8	5.6	484
SP3031	60	201.3	63.8	5.6	486
SP3032	60	205.1	63.8	5.6	488
SP3033	60	208.8	63.8	5.6	490

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Seal Ring Support Plate	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Priming Inducer	304 Stainless Steel
Coupling	329/431 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/PPS
Check Valve Seat	NBR/316 Stainless Steel
Top Bearing	NBR/304 Stainless Steel
Upthrust Disc	Carbon/Graphite
Upthrust Stop Washer	304 Stainless Steel