



SERIE SP


230 GPM

ACERO INOX

RANGO : 150 - 300 GPM

OUTLET: 3" ó 4" NPT

NOMINAL DIA. 6"

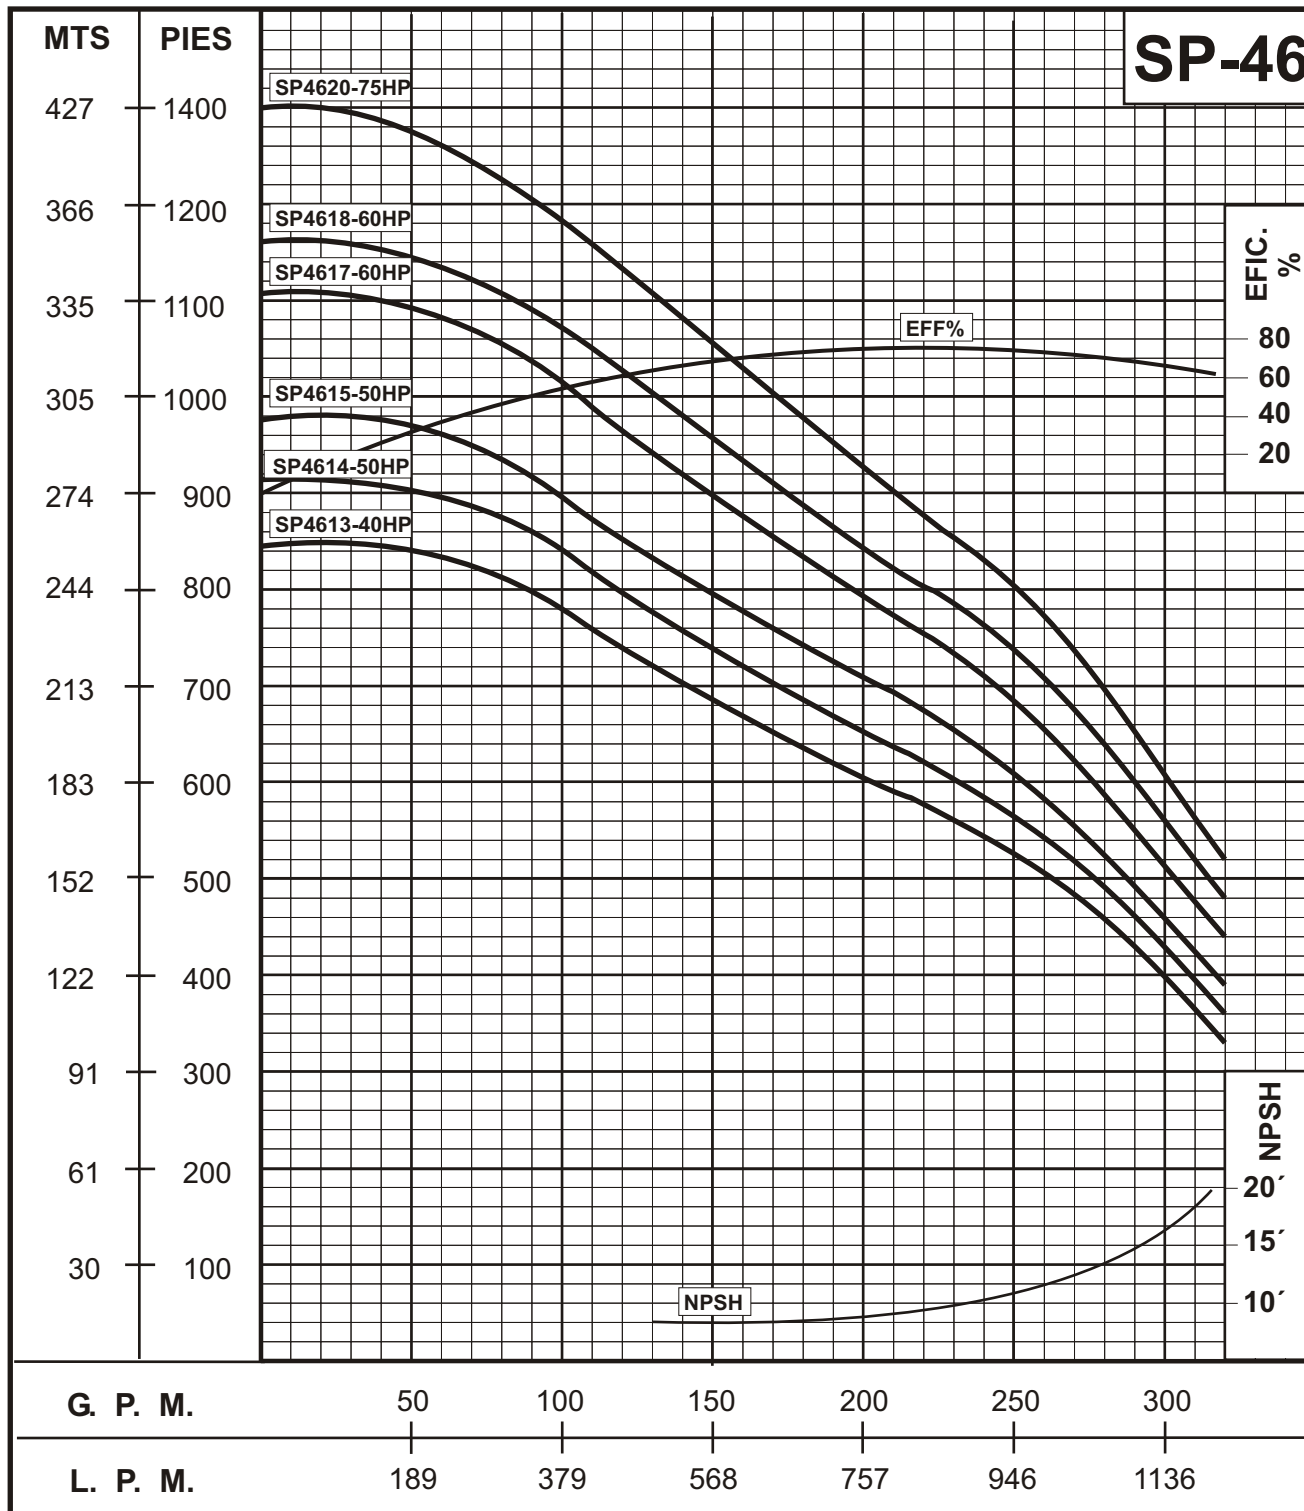

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B
6" MOTOR STANDARD, 10-60HP/3450 RPM. @ 8 ft. Min. Submergence.
8" MOTOR STANDARD, 75HP/3450 RPM




Geobombas Ltda.



Franklin Electric

SERIE SP	230 GPM	ACERO INOX.
----------	---------	-------------

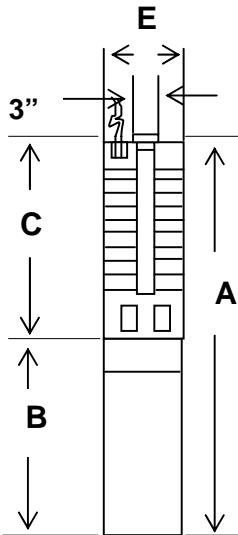

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP4613	40	109.2	40.8	5.7	284
SP4614	50	130.7	57.8	5.7	388
SP4615	50	135.2	57.8	5.7	393
SP4616	50	139.6	57.8	5.7	399
SP4617	60	151.2	63.8	5.7	438
SP4618	60	155.6	63.8	5.7	445
SP4619	60	160.1	63.8	5.7	449
SP4620*	75	154.7	47.4	7.5	634

*4" NPT, 8" MOTOR REQUIRED

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	329/416 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/304 Stainless Steel
Check Valve Seat	NBR/316 Stainless Steel
Top/Lower Bearing	NBR/316 Stainless Steel
Upthrust Washer	Carbon/Graphite HY22
Upthrust Stop Ring	316 S.S/ Tungsten Carbide