



SERIE SP


230 GPM

ACERO INOX

RANGO : 150 - 300 GPM

OUTLET: 3" NPT

NOMINAL DIA. 6"

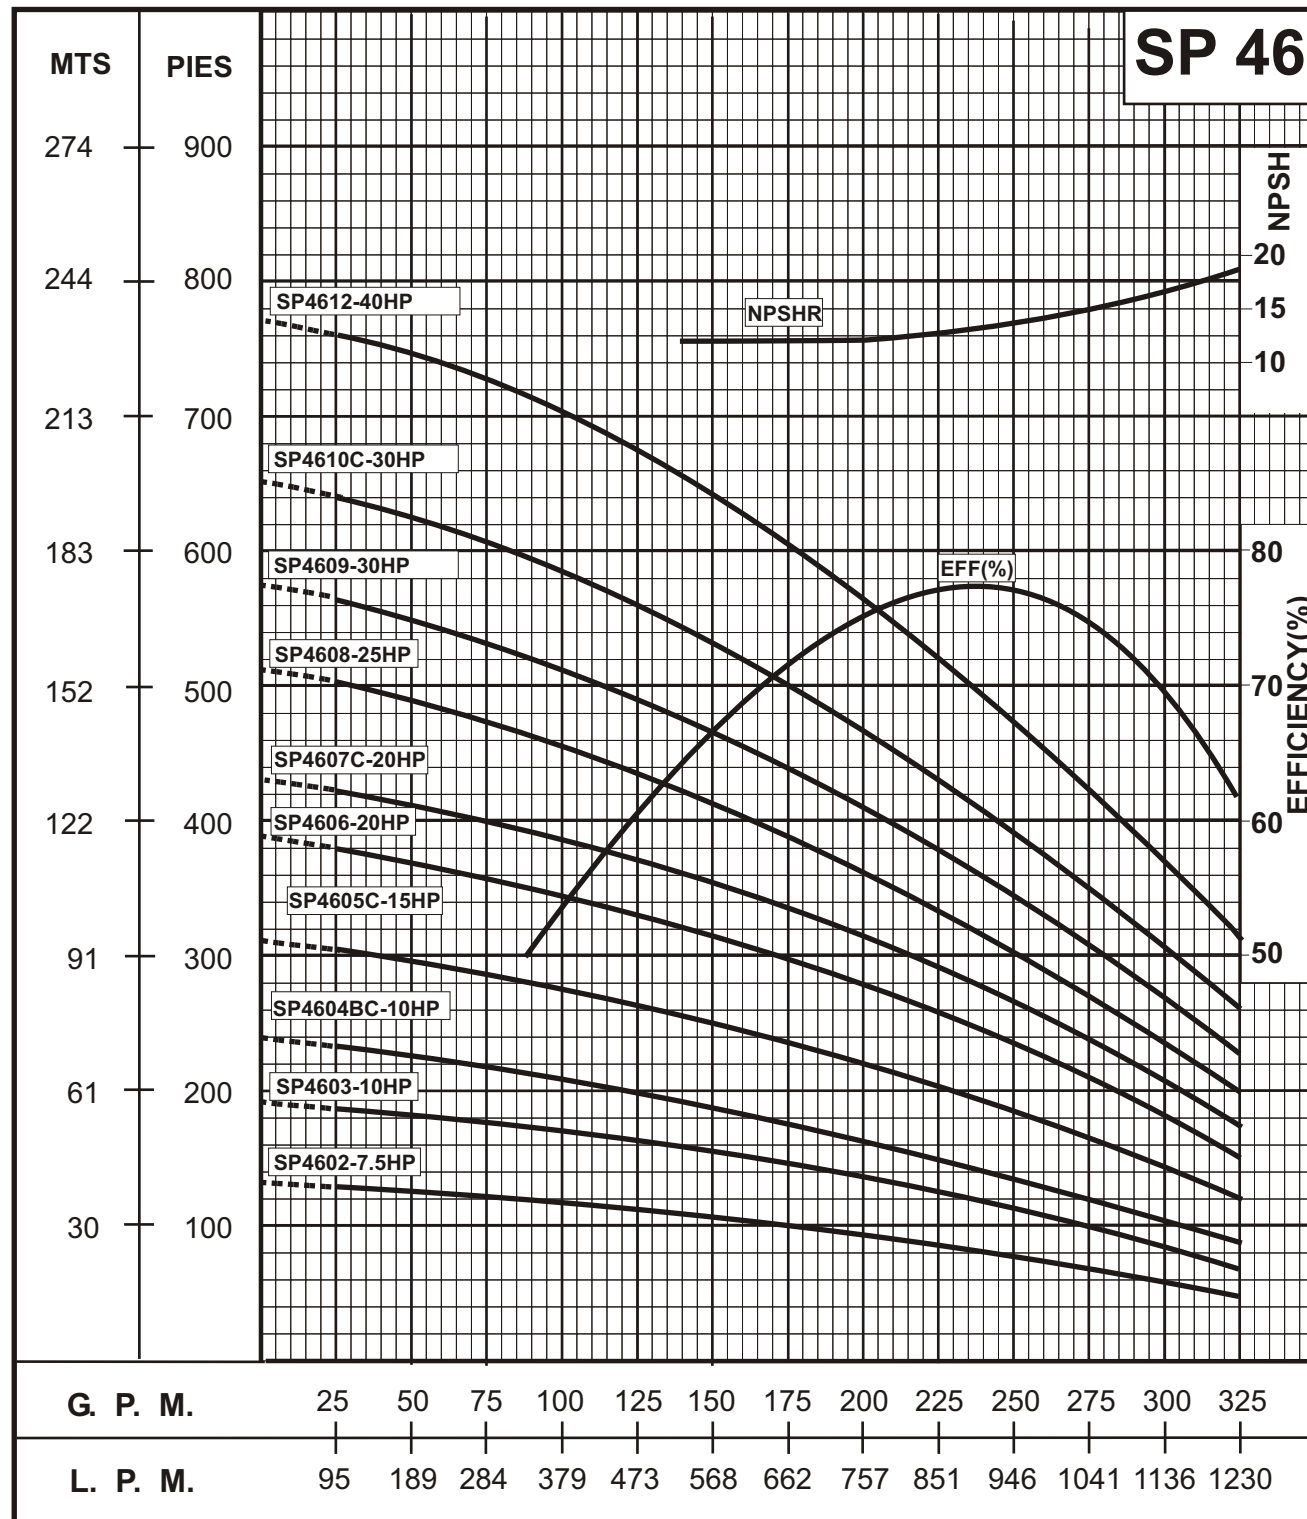

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B 6" MOTOR STANDARD, 3450 RPM. @ 8 ft. Min. Submergence.




Geobombas Ltda.



Franklin Electric

SERIE SP	230 GPM	ACERO INOX.
----------	---------	-------------

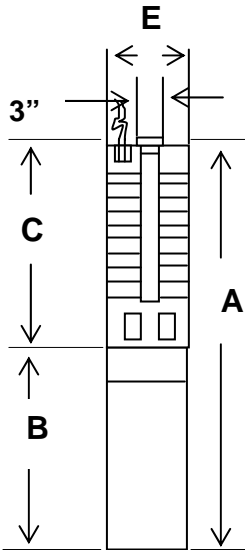

MODEL	HP	DIMENSIONS IN INCHES		MAX. WINDTH (E)	APROX.MT. (LBS)
		A	B		
SP4602(4")	7.5	48.5	29.6	5.6	88
SP4603	10	49.3	25.4	5.7	140
SP4604BC	10	54.9	25.4	5.7	161
SP4605C	15	62.0	28.0	5.7	167
SP4606	20	69.1	30.6	5.7	186
SP4607C	20	72.6	30.6	5.7	202
SP4608	25	79.6	33.1	5.7	209
SP4609	30	86.7	35.7	5.7	228
SP4610C	30	96.3	35.7	5.7	234
SP4612	40	105.3	40.8	5.7	234

COMPONENT	MATERIAL OF CONSTRUCTIONS
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	329/416 Stainless Steel
Coupling Key	302/304 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR/304 Stainless Steel
Check Valve Seat	NBR/316 Stainless Steel
Top/Lower Bearing	NBR/316 Stainless Steel
Upthrust Washer	Carbon/Graphite HY22
Upthrust Stop Ring	316 S.S/ Tungsten Carbide