



Geobombas Ltda.



Franklin Electric

SERIE SP


75 GPM

ACERO INOX

RANGO: 45 - 95GPM


OUTLET: 2" NPT

NOMINAL DIA. 4"

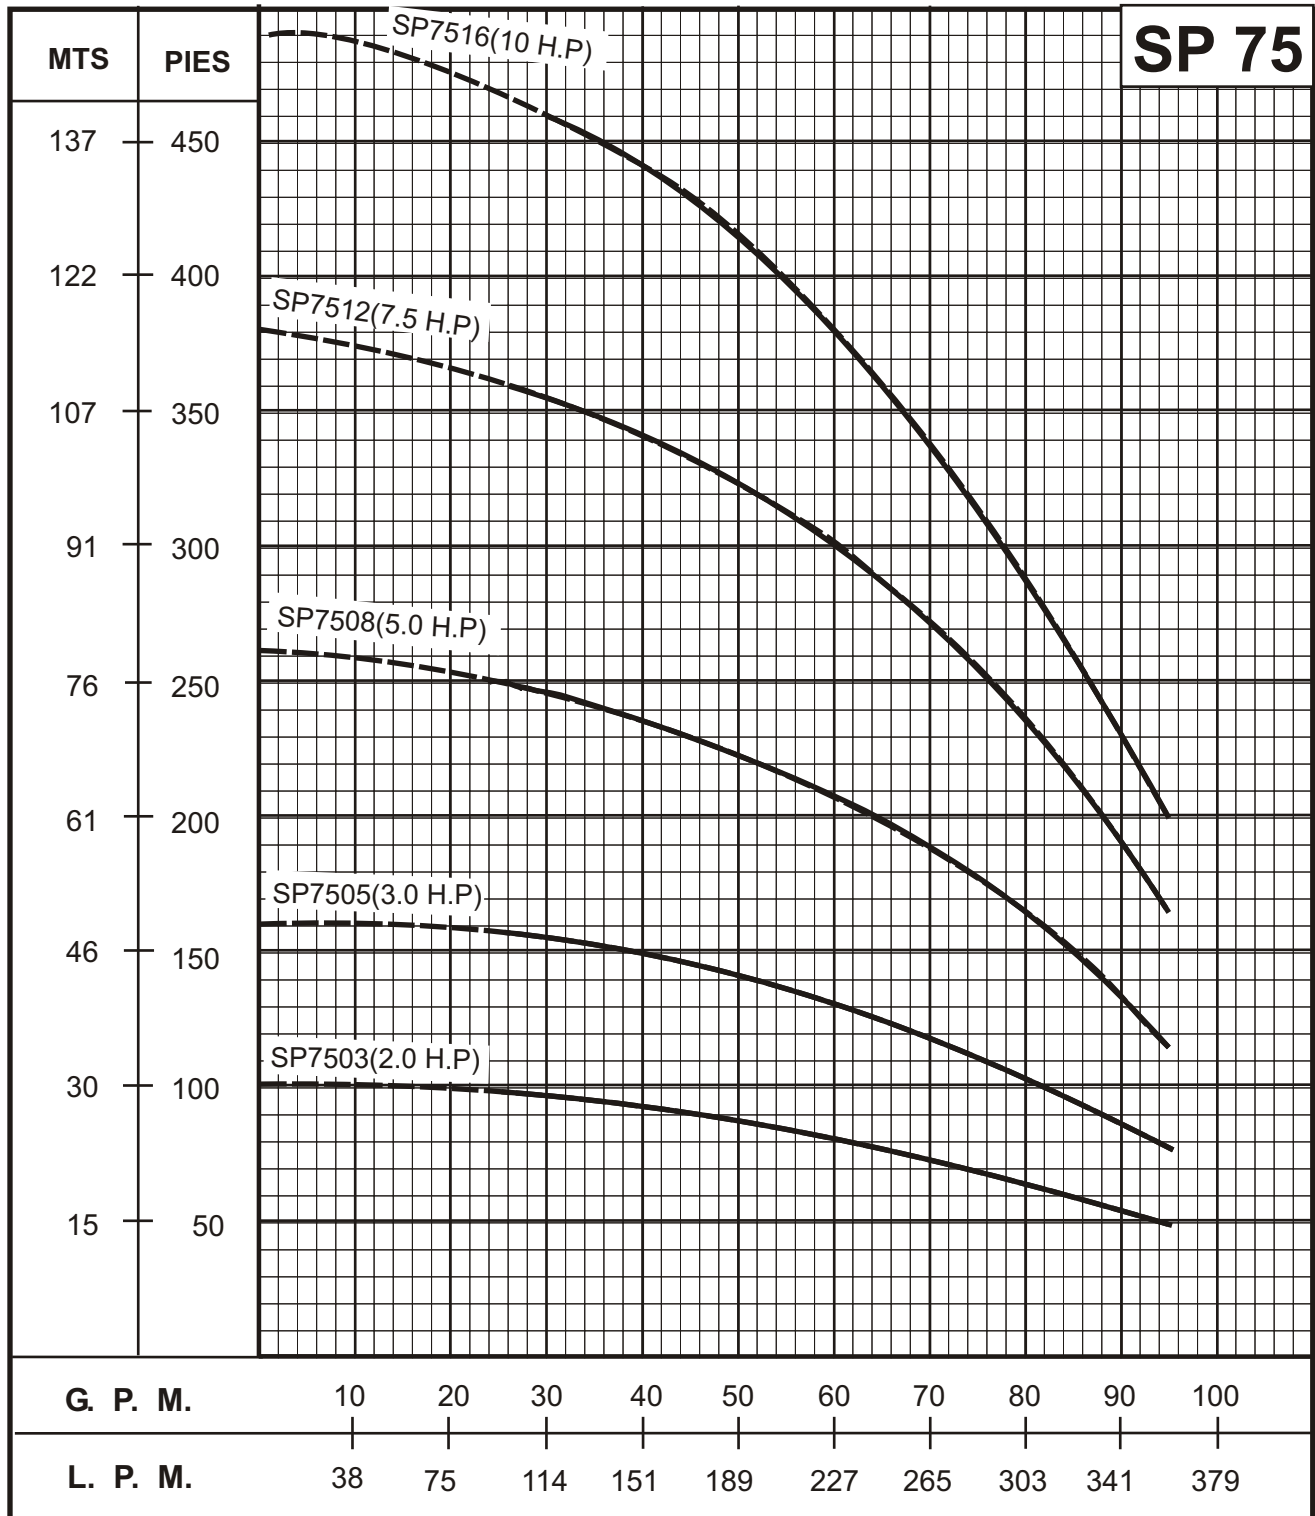

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. Performance conforms to ISO 2548 annex B 4" MOTOR STANDARD, 3450 RPM. @ 5 ft. Min. Submergence.

| | | |
|----------|--------|------------|
| SERIE SP | 75 GPM | ACERO INOX |
|----------|--------|------------|

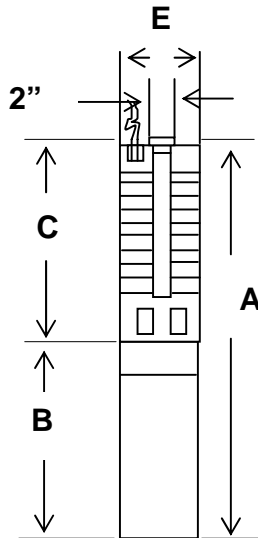

| MODEL | HP | DIMENSIONS IN INCHES | | MAX. WINDTH (E) | APROX.MT. (LBS) |
|---------|------|----------------------|-------|-----------------|-----------------|
| | | A | B | | |
| SP7503 | 2.0 | 30.0 | 15.1 | 3.9 | 38 |
| SP7505 | 3.0 | 43.7 | 23.6 | 3.9 | 64 |
| SP7508 | 5.0 | 57.4 | 29.6 | 3.9 | 78 |
| SP7512 | 7.½ | 67.5 | 29.6 | 3.9 | 100 |
| SP7516* | 10** | 44.44 | 25.44 | 3.9 | 100 |

*These model are manufactured with special order.
 ** Motor 6"

| COMPONENT | MATERIAL OF CONSTRUCTIONS |
|------------------------|---------------------------|
| Check Valve Housing | 304 Stainless Steel |
| Check Valve | 304 Stainless Steel |
| Diffuser Chamber | 304 Stainless Steel |
| Split Cone Nut | 304 Stainless Steel |
| Split Cone | 304 Stainless Steel |
| Impeller | 304 Stainless Steel |
| Suction Interconnector | 304 Stainless Steel |
| Inlet Screen | 304 Stainless Steel |
| Straps | 304 Stainless Steel |
| Cable Guard | 304 Stainless Steel |
| Priming Inducer | 304 Stainless Steel |
| Coupling | 329/304 Stainless Steel |
| Coupling Key | 302/304 Stainless Steel |
| Pump Shaft | 431 Stainless Steel |
| Intermediate Bearings | NBR |
| Impeller Seal Ring | NBR/304 Stainless Steel |
| Check Valve Seat | NBR/304 Stainless Steel |
| Top Bearing | NBR/304 Stainless Steel |
| Motor Adaptor Plate | 304 Stainless Steel |
| Sleeve | 304 Stainless Steel |